

The Role of the BATSE Instrument Response in Creating the GRB E-Peak Distribution

J. J. Brainerd,¹ G. Pendleton, R. Mallozzi, M. S. Briggs, R. D. Preece

University of Alabama in Huntsville

(1) E-mail: *Jim.Brainerd@msfc.nasa.gov*

Abstract. All gamma-ray bursts are observed to have approximately the same characteristic gamma-ray energy. We show in this article that for bursts in the BATSE data set, this property as measured by the E-peak value is not an instrumental effect, but a physical property of gamma-ray bursts.

1. The Characteristic Photon Energy of Bursts

The prompt emission of gamma-ray bursts is observed predominately at several hundred keV. This is one of the most interesting features of gamma-ray bursts, since it is not easily explained by most theories of prompt gamma-ray emission. In particular, the internal and external shock theories predict a wide variation in the characteristic gamma-ray energy both during a burst and between bursts. It is therefore imperative to know whether this is a physical characteristic of bursts, or a consequence of an instrumental effect.

In this article, we discuss the instrumental effects that arise when observing gamma-ray bursts with the Burst and Transient Source Experiment (BATSE) on the Compton Gamma-Ray Observatory (CGRO). [2] The primary points that affect the observed distribution function are the ability to correctly define the characteristic energy of the gamma-ray burst and the ability to trigger on a gamma-ray burst with a characteristic energy outside of the trigger energy range. These effects are discussed in §2 and §3 below. Models of simple distributions for the characteristic energy are given in §4, and their consistency with the observations is discussed in §5. We find that the observed distribution of characteristic energies cannot be explained through instrumental effects alone. A model distribution with a characteristic energy is fit to the observations to quantify the type of physical theory required by the observations. Our conclusion is that the existence of approximately the same characteristic energy for all gamma-ray burst spectra is a physical property of gamma-ray bursts that any viable theory must explain.

2. Defining E-Peak

One can characterize the gamma-ray burst spectrum through the E-peak value (E_p), the photon energy at which the νF_ν curve has a maximum. The distribution of such values as measured by the BATSE gamma-ray burst instrument is narrowly distributed. [3] The standard method of modeling a gamma-ray spectrum is forward

fitting. In this method, a model photon spectrum is folded through a model of the detector response matrix (DRM) to produce a count spectrum. The count spectrum is then compared to the observed spectrum, with the best fit found through χ^2 minimization. The photon model used in the analysis of the BATSE gamma-ray burst spectra is the gamma-ray burst spectral form,[1] which is a 4 parameter model that produces good fits to the data. The data type used in deriving E_p for the BATSE data set is the MER data type, which covers the spectrum with 16 channels.

To test the ability of BATSE to correctly determine the value of E_p , we generated test burst count spectra with background counts added for model spectra of a given E_p , and then went through the procedure of subtracting background and deriving the values of E_p that provide the best fit to the test spectra. We find that the forward fitting method correctly defines the value of E_p for $20 \text{ keV} < E_p < 2 \text{ MeV}$. Once one is outside this range, either no value of E_p is found, or the value that is found is at one of these two limits on E_p . Because few BATSE bursts have E_p at $\approx 2 \text{ MeV}$, and no BATSE burst is at $\approx 20 \text{ keV}$, the misidentification of the value of E_p for $E_p > 2 \text{ MeV}$ and $E_p < 20 \text{ keV}$ is inconsequential.

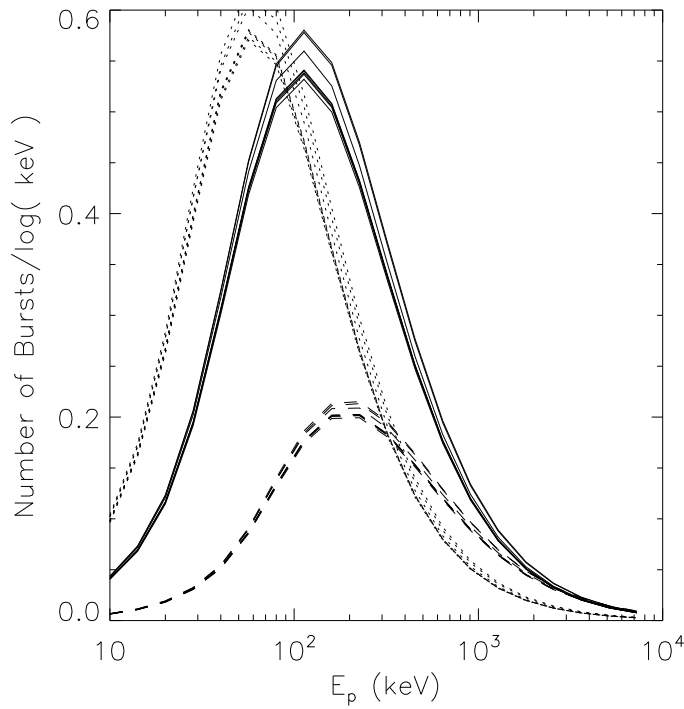


Figure 1. Expected E-Peak distribution for bursts with $C > C_{min}$ such that most bursts lie on the $-3/2$ portion of the cumulative peak-flux distribution. Here, C is the burst count rate in the energy range of the trigger and C_{min} is the limiting count rate for selecting bursts. The solid curves are for triggering on an energy range of 50–300 keV, the dotted lines are for triggering on a range of 20–100 keV, and the dashed lines are for triggering on the range of $> 100 \text{ keV}$. The different curves are for different burst directions relative to Earth. The spectral model used in these curves is a grb spectral form with $\alpha = -1$ and $\beta = -3$.

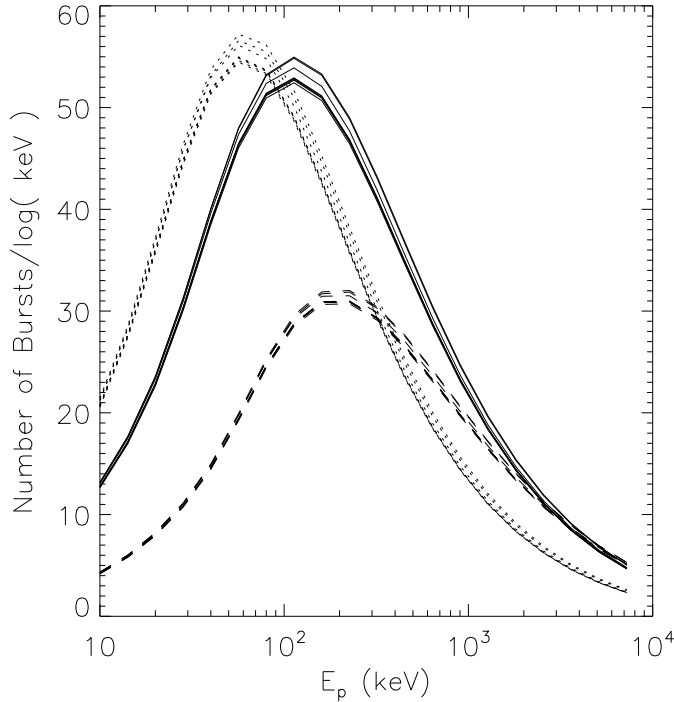


Figure 2. Expected E-Peak distribution for bursts with $C > C_{min}$, with C_{min} selected to place most bursts on the -0.8 portion of the cumulative peak-flux distribution. The remainder of the free parameters in the models is as in Fig. 1.

3. BATSE Triggering

The BATSE instrument triggers on a gamma-ray burst when the count rate in the trigger channels exceed an average background count rate by a preset value. Of the eight modules that comprise BATSE, at least two must be above the background rate for the burst to trigger. The triggering is done using four discriminator channels on the timescales of 1.024 s, 0.256 s, and 0.064 s. For most bursts, the triggering is on channels 2 + 3, which contain counts in the 50 keV to 300 keV energy range.

To model the trigger of a gamma-ray burst, we ran Monte Carlo simulations of the count rates generated by a gamma-ray burst of a given normalization and value of E_p . The randomness in this simulation was in the orientation of the spacecraft relative to the gamma-ray burst and to the center of the earth. Two aspects that affect the count rate found for a burst are the orientation of all detectors to the burst, and the component of the burst scattered into the detectors from Earth's atmosphere. One aspect this simulation did not address was the angular dependence of the background count rate. The purpose of the analysis was to determine the average count rate in the second brightest detector as a function of E_p . The result is used to relate the photon rate of a burst to the count rate in the trigger channels.

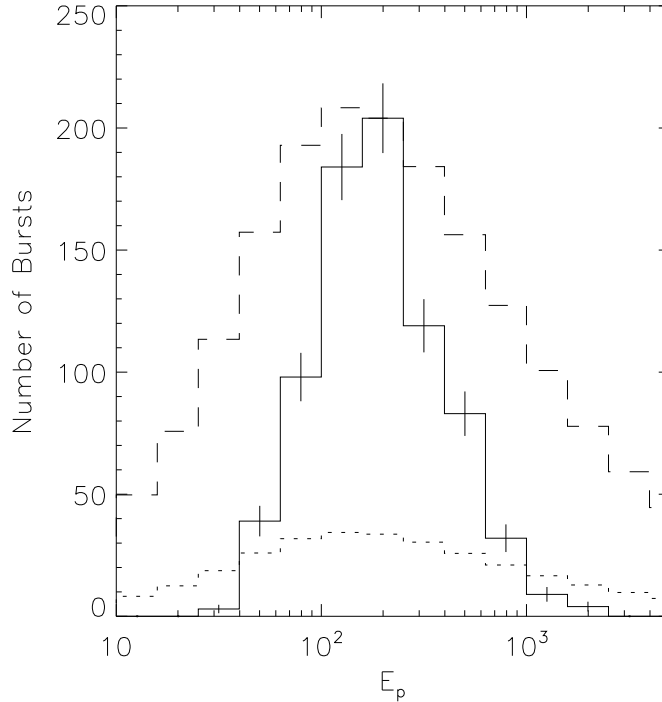


Figure 3. Best fit of power law E-peak distribution to the BATSE E-peak distribution. The solid curve gives the observed distribution of E_p . The dotted curve is the best fit model, while the dashed curve is the best fit model renormalized to match the maximum of the observed distribution.

4. Model E-Peak Distributions

Based on the conversion of photon spectrum to count rate, one can convert model distributions in E_p and N_p , the photon rate at E_p , into distributions in E_p as functions of C_{min} , the minimum count rate. In doing this, we assume that the minimum count rate is high enough above the background that threshold effects are unimportant. We are also ignoring the fact that different detectors will have different background count rates. We assume that the distribution of N_p is a broken power law similar to the peak-flux broken power law, with the power law having an index of -1.8 below the break, and an index of $-5/2$ above the break. The value at which power law index breaks in the N_p distribution is assumed to depend on E_p as E_p^{-2} , which is equivalent to the statement that the total energy per unit time emitted as gamma-rays is independent of E_p for bursts that fall on the break of the peak-flux curve. Two models for the E_p distribution are used. The first is a power law, so that there is no characteristic value of E_p defined by the physics. The second is a log normal curve with two power laws joined on to the wings of the distribution. This second is used to fit the observed E_p distribution to demonstrate the extent to which the physical E_p distribution must break to reproduce the observations.

The model distributions for a power law E_p distribution are given in Figures 1 and

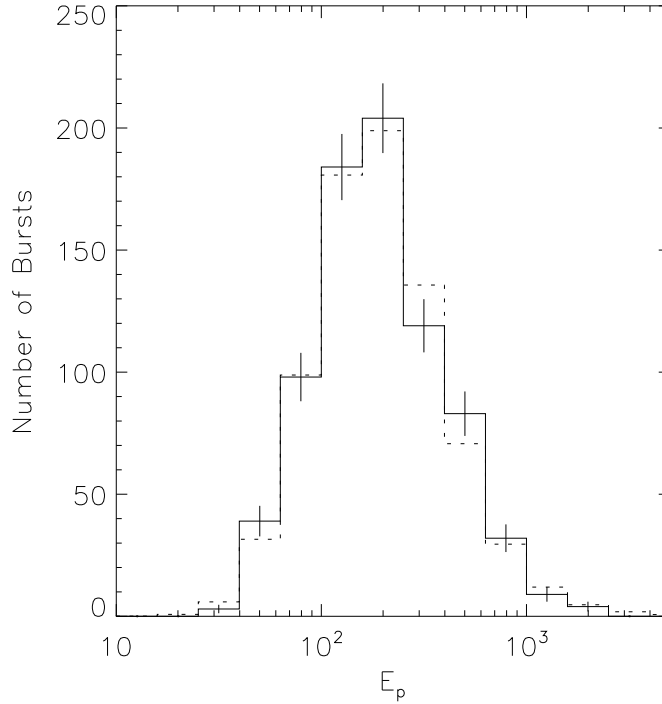


Figure 4. Best fit of log normal E-peak distribution to the BATSE E-peak distribution. The solid curve is the observed distribution, while the dotted curve is the best fit model.

2. These curves are calculated for three different trigger energy ranges: channels 1 + 2 (20 keV–100 keV), channels 2 + 3 (50 keV–300 keV), and channels 3 + 4 (> 100 keV). The power law index for the E_p distribution is set to -1 . The difference between Figures 1 and 2 are in the minimum count rate. The first has a minimum count rate such that most bursts are in the $-3/2$ portion of the cumulative peak-flux distribution, while the second has a count rate such that most bursts are on the -0.8 portion of the cumulative peak-flux distribution. The effect of lowering the count rate limit is to broaden the E_p distribution.

5. Fits of E-Peak Distributions

The observed E_p distribution was fit to the power law E-peak distribution. Most bursts have low count rates, placing them below the break in the peak-flux distribution, so the low count rate model for the E_p distribution is used. We find that the best power law index for the E_p distribution is -0.94 ± 0.11 , with $\chi^2 = 444.4$ for 8 degrees of freedom. This is clearly a poor fit to the data. This model and the observed E_p distribution are given in Figure 3. The model distribution is much broader than the observed distribution. This demonstrates that the physical distribution of E_p must have a characteristic value near 200 keV to produce the observed distribution.

Just how narrow the physical distribution must be is demonstrated by the fit of a

log normal distribution to the observations. In this distribution, the half maxima are a factor of 4 apart, and the power law tails have indexes of 3.35 and -2.58 , so that the change in index exceeds 5. The model fit has $\chi^2 = 7.93$ for 5 degrees of freedom, which is an excellent fit to the data. The physical distribution therefore must be very narrow to reproduce the observations. This fit also suggests that above 1 MeV, each decade in E_p contains $< 10\%$ of the bursts in the lower decade, and that below 100 keV, each decade contains $< 1\%$ of the bursts in the higher decade.

6. Discussion

We have presented the results of our study of the BATSE instrumental effects that affect the determination of the E_p distribution. Our results are as follows:

- Model fitting of spectra to gamma-ray burst spectra correctly gives the value of E_p for $20 \text{ keV} < E_p < 2 \text{ MeV}$.
- The power law model curves for the E_p distribution for bursts that trigger on the 50–300 keV count energy range have maxima at $\approx 100 \text{ keV}$, and half-maxima at $\approx 20 \text{ keV}$ and $\approx 800 \text{ MeV}$.
- The power law model curves provide poor fits to the observations, because the observations are at $\approx 10\%$ of the peak values at the energies where the model curves have their half-maxima.
- Fitting a log normal E_p distribution to the observations finds that the best fit is very narrow, with power law wings that differ by 5 in index.

These results demonstrate that the narrow E_p distribution must have a physical origin. Theories of the prompt gamma-ray emission must provide an explanation for this property before they can be regarded as viable.

Acknowledgments

This research was supported under the NASA grant NAG5-6746.

References

- [1] Band *et al* 1993, ApJ, 413, 281–292
- [2] Brainerd, J. J., G. Pendleton, Mallozzi, R., Briggs, M. S., & Preece, R. D., 1999, ApJ, submitted.
- [3] Mallozzi, R. S., *et al* 1996, in *AIP Conf. Proc. 384: Gamma-Ray Bursts, 3rd Huntsville Symposium*, ed. C. Kouveliotou, M. S. Briggs, & G. J. Fishman (New York: AIP) p. 204.